

# ERE 35/40

(AC Drive)

Electric Stand-on Pallet Truck  
(3500 / 4000 kg.)



- MOSFET programmable stepless speed controller.
- Multifunction tiller head with enhanced safety.
- Unique linkage mechanism to provide jerk free lift of loaded pallet.
- Optional dual speed setting for pedestrian and stand-on mode.

The Jost's Electric Stand-on Pallet Truck, type ERE has been designed specially for the flexible handling of palletised loads in dual mode either as pedestrian or stand-on pallet truck. The ERE optimally adjusts to any application by simply folding the platform up or down. It is ideal for lorry loading / unloading and also for transportation of material inside medium and large warehouses. When compared with simple pedestrian models, ERE can provide higher throughput achieved with higher speed on stand-on mode, thus the goods can be cost effectively transported over long distances. **Jost's Pallet trucks with AC technology provides additional advantage of reduced maintenance, improved power utilisation and improved battery life.**

**Operator Area :** The stand-on foldable platform provides excellent comfort and safety. The dampening spring mechanism provides the required cushioning effect that swallows the jerks due to bumps on surface. The rubberized anti-skid mat provides good grip on stand-on mode enhancing the safety. Emergency stop button provides maximum safety for the operator.

**Drive :** The powerful 1.5 kw high performance AC motor of 1 hour rating with high over load capacity efficiently drives a low noise, two stage compact gear unit mounted directly on to the drive wheel.

**Drive Control :** Microprocessor based MOSFET controller provides smooth and stepless control of speed and acceleration. It also helps in obtaining fault diagnostic information quickly and easily. The high life cycle contactors used in the control circuit enhances dependability and productivity. The controller can also enable dual setting for different speed limits in pedestrian as well as stand-on mode (optional).

**Chassis :** Robust construction and the stable five point contact design enhances stability during turning. The rounded enclosed contours permits safe maneuvering in confined spaces. The battery holding compartment in the chassis is provided with suitable roller bed for easy removal of the battery.

**Wheels :** All wheels ( Drive wheel  $\varnothing 200 \times 85$  mm wide, Load wheels  $\varnothing 85 \times 75$  mm wide tandem, Support castors  $\varnothing 150 \times 50$  mm wide) are made of polyurethane material as a standard. These enable noiseless smooth ride over variety of surfaces and cause less damage to expensive flooring. These also have better ability to withstand impact loads while rolling over bumps on the surfaces. The tandem load wheel configuration ensures smooth roll over with continuous contact on the floor and enables easy negotiation over small bumps without jerk. These also enable easy entry into closed pallets.

**Tiller Head :** Multifunction tiller head with ergonomically arranged operating elements for travel, lift, lowering and horn at finger tips provide highest operator comfort and safety. It also has a belly button that provides additional safety in case of emergencies.

**Steering :** The tiller control handle configuration enable easy steering with out much effort in both stand-on as well as pedestrian mode. Steering lock at  $90^\circ$  on either side and can be operated only in limited range of handle inclinations comfortable to operator. This provides additional operational safety.

**Forks :** Robust steel fabricated forks ensure long lasting and durable service.

Various options of fork lengths and width over forks are available for different types of pallets. The fork ends are suitably tapered to provide better maneuverability while turning in confined spaces.

**Brake :** Electromagnetic disc brake with hard wearing, asbestos free liner provides quick braking. When the handle is close to vertical or horizontal position, the brake becomes operational with simultaneous power cut-off.

**Hydraulic System :** Compact power pack unit with high pressure pump driven by 0.8 Kw sturdy compound wound motor operates the lifting mechanism comprising of low lift hydraulic cylinder and load wheel linkages for jerk free lift of the loaded pallet for the required ground clearance. The compact system consumes less battery power and is designed with very little scope for hydraulic losses.

**Safety :** The truck is equipped with automatic lift cut off at 80% battery discharge condition for enhanced safety, emergency power cut-off switch on chassis panel and anti-collision switch on tiller head. The hydraulic circuit has safety feature like pressure relief valves and non return valves.

**Servicing :** The modular service friendly design with easily removable front cover provides easy access to all components for servicing thus saving valuable time during maintenance.

**Battery :** 24V / 330Ah traction batteries for 3500 / 4000 kg models are provided as standard supplies.

**Charger :** 24V / 35Amp high frequency constant current automatic charger is supplied as a standard.

### Specification

		ERE 35	ERE 40
<b>Performance Data</b>	Model		
	Drive	type	AC
	Capacity	Q = Kg.	3500
	Load center for rated capacity	c = mm	600
	Load distance (from load wheel to fork face)	L2 = mm	810
	Travel speed (min.),laden	kmph	4.2
	Travel speed (min.),unladen	kmph	4.5
	Lift speed, laden / unladen	cm/s	1.6 / 2.5
	Lowering speed, laden / unladen	cm/s	3.1 / 2.5
	Gradient performance, laden / unladen	%	6 / 16
	Battery weight, apx.	Kg.	310
	Service weight incl. 'battery, apx.	Kg.	825
<b>Technical Data</b>	Wheelbase	Y = mm	1570
	Wheels number front / rear ( x=driven wheels )	nos.	1x +2 / 4
	Load Wheel	mm	Ø85x75W
	Side support castor wheel	mm	Ø150x40W
	Drive wheel	mm	Ø200x85W
	Wheels, Track width, front / rear	B2 / S = mm	606 / 385
	Overall length	L = mm	1960
	Lift	h1 = mm	115
	Fork lowered height	h = mm	90
	Safety clearance	a = mm	100
	Front overhang	G = mm	264
	Overall Width	B1 = mm	850
	Fork dimensions	s/ e/l = mm	55/ 185 /1150
	Load Wheel / Forks tip distance	X = mm	186
	Width over forks (WOF)	m = mm	570
	Ground clearance, center of wheel base (unladen)	GC = mm	25
	Turning radius (pedestrian mode)	Wa = mm	1900
	Drive control	type	Mosfet
Sound level at driver's ear	db(A)	85	

### Working Aisle Width Ast. (mm) Incl. 200 mm safety clearance

Pallet size c x b	Position	mm	Working aisle width*
800 X 1200	Crosswise	mm	2400
800 X 1200	Lengthways	mm	2560
1000 X 1200	Crosswise	mm	2400
1000 X 1200	Lengthways	mm	2640
1200 X 1200	Lengthways	mm	2730



Note: 90° stacking aisle width., \* : pedestrian mode

### Optional Fork Lengths and Widths

Capacity (Kg)	Fork length (mm)	Width over fork (mm)	
3500	1150	680	750
4000	1150	680	750
3500	1250	680	750
3000	1400	680	750
3000	900	680	750

\* For any special requirements, Please contact Jost's HO. Dimensions indicated here are subject to variations of ± 20mm and performance ± 10%. Service weight ± 50kg. Right to make changes and technical improvement reserved.

### ERE 35/40

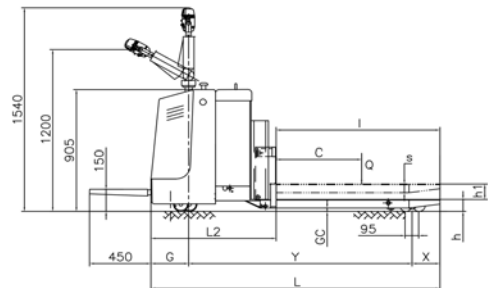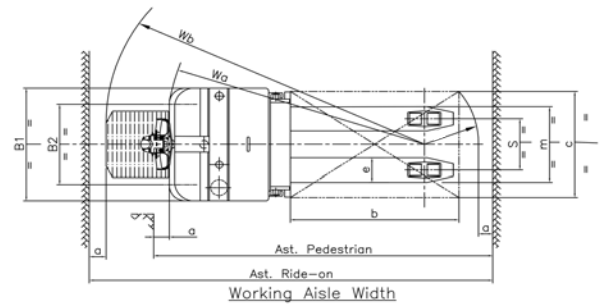

### Jost's Engineering Company Limited

C-7 Wagle Industrial Estate, Road No. 12, Thane - 400 604. Maharashtra. INDIA.

T.: +91.22.6117 4000 / 2582 1748 F.: +91.22.6117 4020 E.: infomhe@josts.in

Bengaluru : +91-80-4123 4775 / 4885 Chennai : +91.44. 2626 8536 / 2628 8407

Delhi : +91.11.4567 6000 / +91.11.4567 6014 Kolkata : +91.33.2242 9510 / 4008 1242

Pune : +91.20.2543 4350 / 90 Secunderabad : +91.40.2771 4934 / 44 / 54 Vadodara : +91.265.2351 642